


# CAW

## Hazardous area (e) convection heaters for gaz or dust Radiateurs pour zone explosive (e) gaz ou poussières

- **ATEX II 2GD - Ex e II T3, Ex tD A21 IP66 T190°C**
- Light weight stainless steel case
- Rectangular finned rod type elements
- Floor or wall mounting (horizontal only)
- Terminal enclosure rated IP66
- Certified ambient temperature range -20°C to 40°C power on.
- Typical applications – Aircraft hangars, Fuel servicing areas, instrumentation cabinets, chemical plants, offshore installations & frost protection

- **Matériels certifiés ATEX II 2GD - Ex e II T3, Ex tD A21 IP66 T190°C**
- Carrosserie légère tout inox
- Éléments chauffants à ailettes
- Montage mural ou au sol (horizontal seulement)
- Étanchéité IP66
- Utilisables de -20°C à +40°C sous tension
- Particulièrement appropriés aux hangars d'aviation, stations services, locaux d'instrumentation, industries chimiques, installations offshore

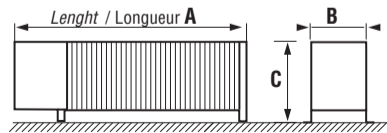

Reference Référence	Output Puissance	Nominal voltage Tension d'alimentation	Length / Longueur A (mm)	Width / Largeur B (mm)	Height / Hauteur C (mm)	Weight Poids (kg)
<b>CAW 050</b>	500 W	230V / 1ph	395	165	201	6
<b>CAW 100</b>	1000 W	230V / 1ph	635	165	201	10
<b>CAW 150</b>	1500 W	230V / 1ph	890	165	201	13
<b>CAW 200</b>	2000 W	230V / 1ph	1115	165	201	15
<b>CAW 300</b>	3000 W	230V / 1ph	1595	165	201	18